



PALANGA

55° 58' 23" N
021° 05' 38" E

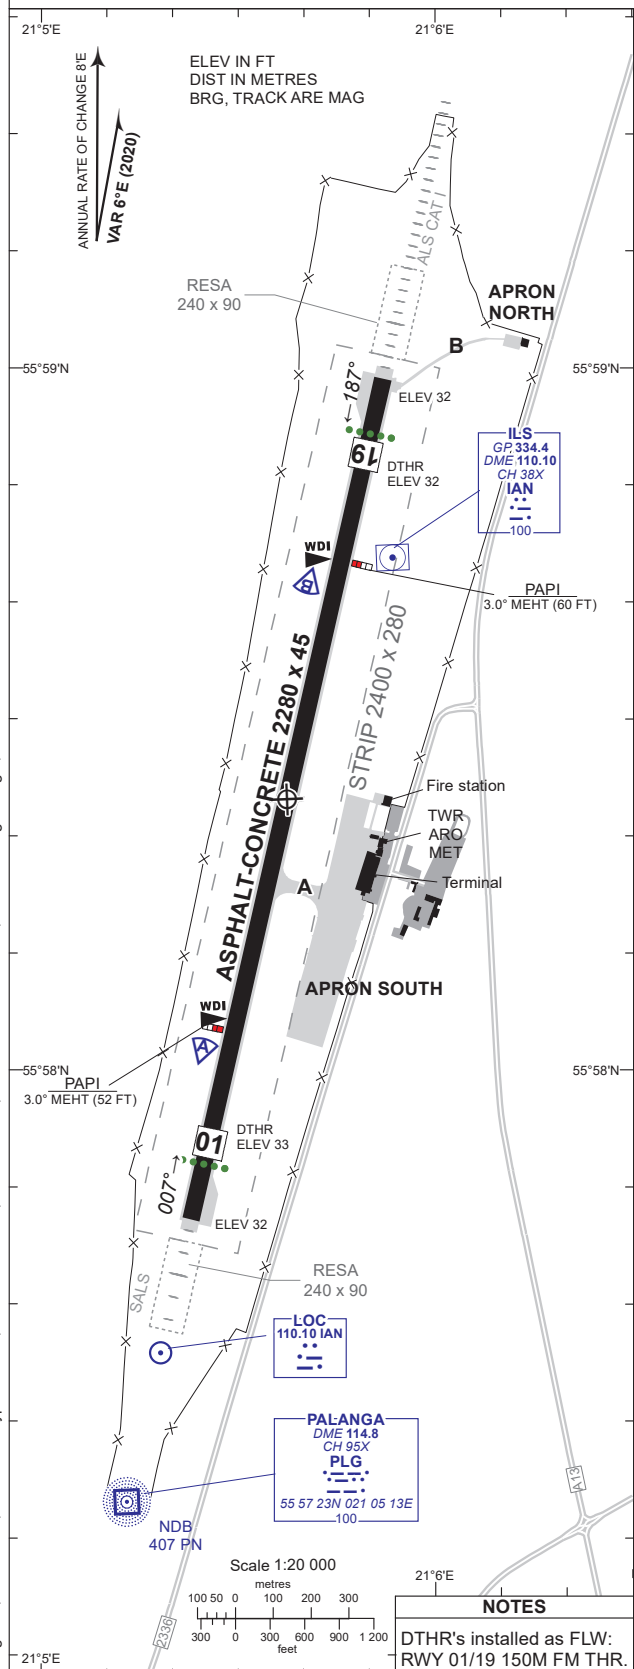

RWY	TRUE DIRECTION	THR	DTHR	BEARING STRENGTH
01	012.73°	55 57 47N 021 05 23E	55 57 52N 021 05 25E	120/F/A/W/T
19	192.73°	55 58 59N 021 05 52E	55 58 54N 021 05 50E	

RWY MARKING AIDS

RWY LIGHTING
AIDS

○ - deepened light
□ - ground light

Changes: marking and lighting aids; turnaround; APCH LGT type RWY19; ARP coordinates; THR01 ELEV; RWY19 TRUE direction; RWY bearing strength; RESA dimensions.

THIS PAGE INTENTIONALLY LEFT BLANK