
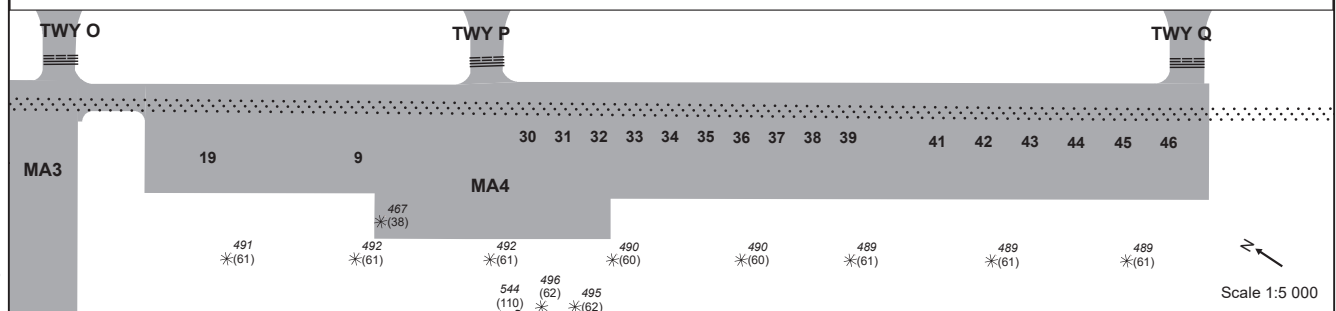
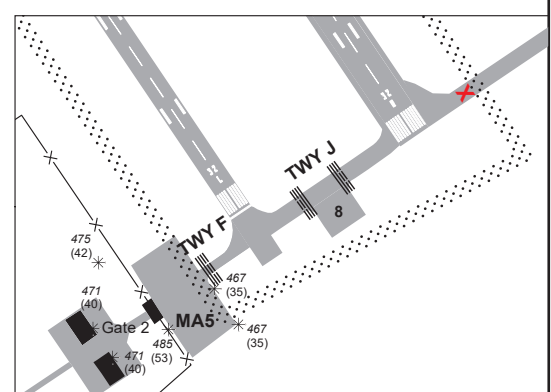
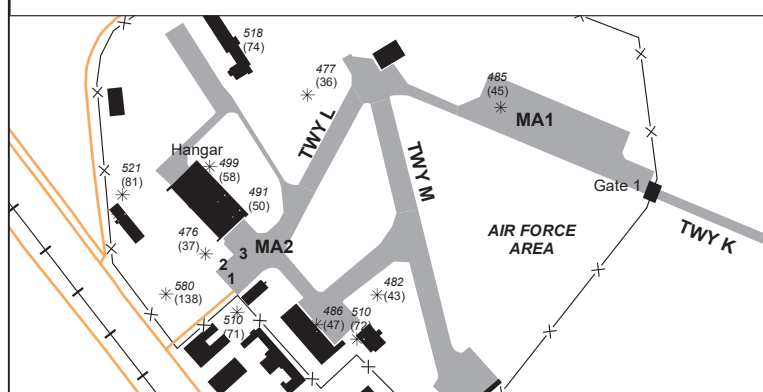


AERODROME GROUND MOVEMENT  
AND PARKING CHART - ICAO

APRON ELEV 447

TWR 120.405  
ATIS 120.755

ŠIAULIAI

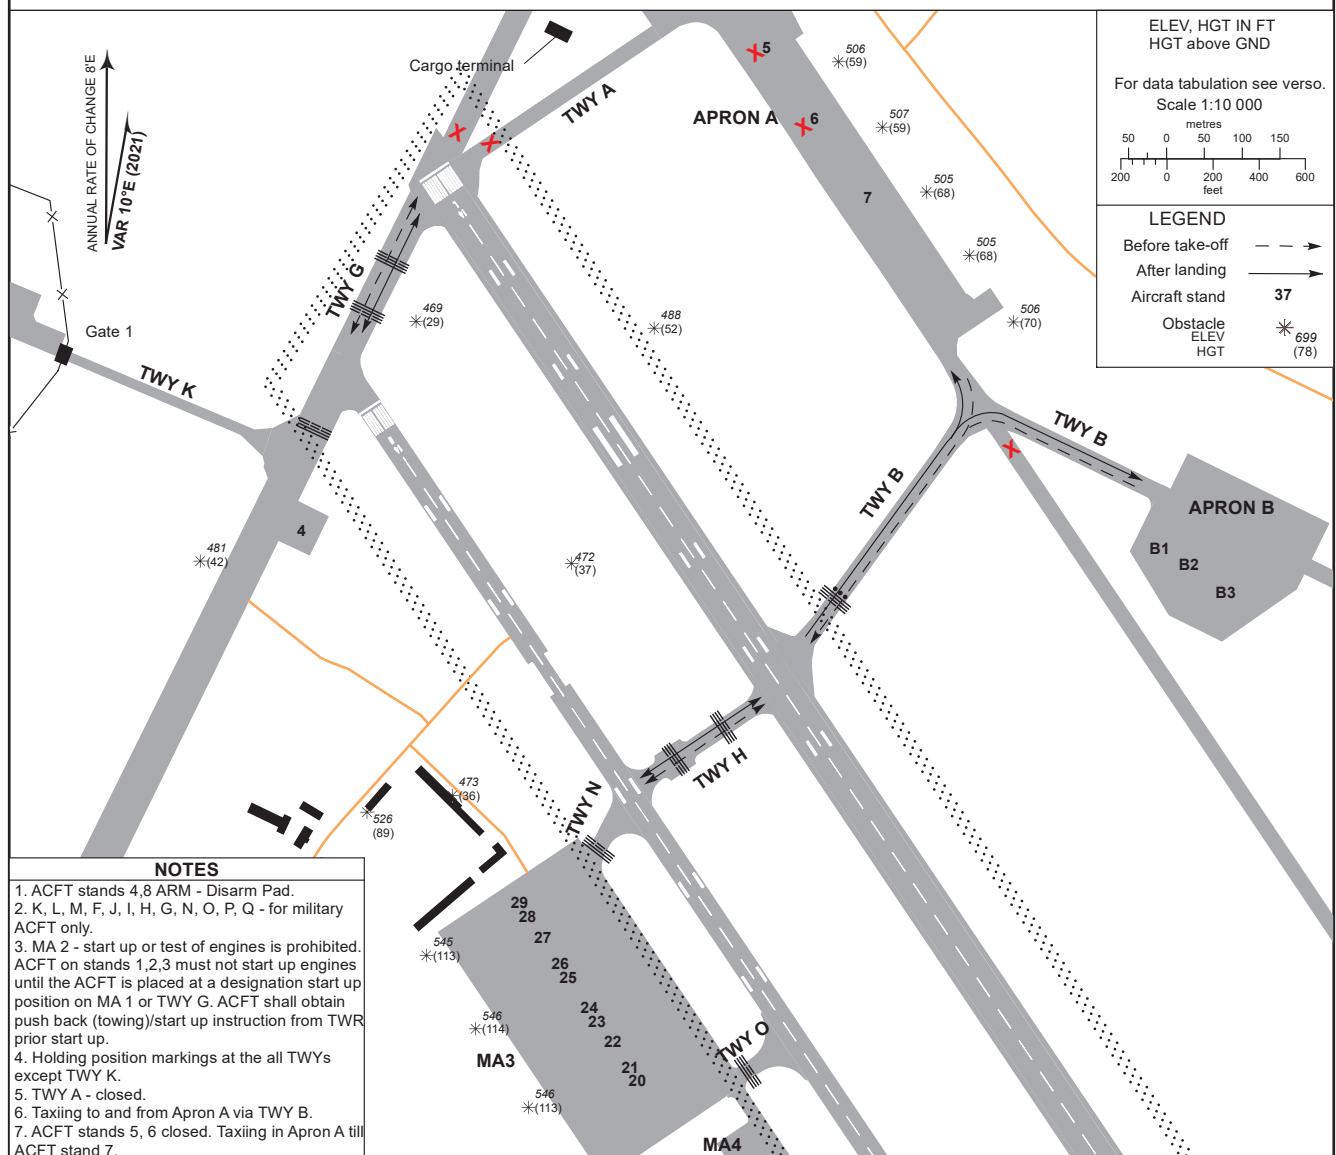

Changes: VAR and date of VAR; obstacles.

24 MAR 2022

©2019 ORO NAVIGACIJA

AIRAC AMDT 002/2022

## AERONAUTICAL DATA TABULATION

| ACFT STANDS |              |               |                  |  |       |              |               |                  |
|-------------|--------------|---------------|------------------|--|-------|--------------|---------------|------------------|
| Stand       | Coordinates  |               | Bearing Strength |  | Stand | Coordinates  |               | Bearing Strength |
| 1           | 55 54 13.40N | 023 21 45.60E | 120/R/D/W/T      |  | 30    | 55 53 37.22N | 023 23 17.16E | 50/R/C/W/T       |
| 2           | 55 54 14.00N | 023 21 45.00E | 120/R/D/W/T      |  | 31    | 55 53 36.59N | 023 23 17.92E | 50/R/C/W/T       |
| 3           | 55 54 14.50N | 023 21 46.50E | 120/R/C/W/T      |  | 32    | 55 53 35.96N | 023 23 18.67E | 50/R/C/W/T       |
| 4           | 55 54 09.70N | 023 22 36.20E | 98/R/D/W/T       |  | 33    | 55 53 35.33N | 023 23 19.42E | 50/R/C/W/T       |
| 5           | 55 54 30.09N | 023 23 10.34E | 120/R/C/W/T      |  | 34    | 55 53 34.70N | 023 23 20.18E | 50/R/C/W/T       |
| 6           | 55 54 25.77N | 023 23 13.94E | 120/R/C/W/T      |  | 35    | 55 53 34.07N | 023 23 20.94E | 50/R/C/W/T       |
| 7           | 55 54 21.74N | 023 23 18.72E | 120/R/C/W/T      |  | 36    | 55 53 33.43N | 023 23 21.69E | 50/R/C/W/T       |
| 8           | 55 52 47.90N | 023 24 32.30E | 120/R/D/W/T      |  | 37    | 55 53 32.80N | 023 23 22.45E | 50/R/C/W/T       |
| 9           | 55 53 39.97N | 023 23 12.89E | 120/R/D/W/T      |  | 38    | 55 53 32.17N | 023 23 23.20E | 50/R/C/W/T       |
| 19          | 55 53 42.50N | 023 23 09.86E | 120/R/D/W/T      |  | 39    | 55 53 31.54N | 023 23 23.95E | 50/R/C/W/T       |
| 20          | 55 53 46.21N | 023 23 01.14E | 120/R/D/W/T      |  | 41    | 55 53 29.91N | 023 23 25.71E | 50/R/C/W/T       |
| 21          | 55 53 46.59N | 023 23 00.69E | 120/R/D/W/T      |  | 42    | 55 53 29.09N | 023 23 26.69E | 50/R/C/W/T       |
| 22          | 55 53 47.70N | 023 22 59.37E | 120/R/D/W/T      |  | 43    | 55 53 28.26N | 023 23 27.67E | 50/R/C/W/T       |
| 23          | 55 53 48.81N | 023 22 58.03E | 120/R/D/W/T      |  | 44    | 55 53 27.44N | 023 23 28.65E | 50/R/C/W/T       |
| 24          | 55 53 49.19N | 023 22 57.59E | 120/R/D/W/T      |  | 45    | 55 53 26.62N | 023 23 29.64E | 50/R/C/W/T       |
| 25          | 55 53 50.67N | 023 22 55.81E | 120/R/D/W/T      |  | 46    | 55 53 25.79N | 023 23 30.62E | 50/R/C/W/T       |
| 26          | 55 53 51.04N | 023 22 55.37E | 120/R/D/W/T      |  | B1    | 55 54 08.80N | 023 23 41.00E | 45/R/A/W/T       |
| 27          | 55 53 52.16N | 023 22 54.04E | 120/R/D/W/T      |  | B2    | 55 54 08.10N | 023 23 43.20E | 45/R/A/W/T       |
| 28          | 55 53 53.27N | 023 22 52.71E | 120/R/D/W/T      |  | B3    | 55 54 06.90N | 023 23 46.00E | 54/R/A/W/T       |
| 29          | 55 53 53.65N | 023 22 52.26E | 120/R/D/W/T      |  |       |              |               |                  |

| Stand | Dimensions M (FT) |
|-------|-------------------|
| 4     | 54x44 (177x144)   |
| 8     | 54x48 (177x157)   |

| APRONS  |                                 |                  |                  |
|---------|---------------------------------|------------------|------------------|
| Apron   | Dimensions M (FT)               | Bearing Strength | Surface          |
| APRON A | 500x75 (1640x246)               | 120/R/C/W/T      | Concrete         |
| APRON B | -                               | 59/F/A/W/T       | Asphalt-Concrete |
| MA 1    | 200x55 (656x180)                | 37/R/C/W/U       | Concrete         |
| MA 2    | 70x35 (230x115)                 | 120/R/C/W/T      | Concrete         |
| MA 3    | 393x223 (1289x732)              | 120/R/D/W/T      | Concrete         |
| MA 4    | 697x71 (2287x233)               | 50/R/C/W/T       | Concrete         |
| MA 5    | 70x50 (230x164) 2 parking areas | 66/R/D/W/T       | Concrete         |

| TAXIWAYS |              |                  |                  |                                                                                                                                                                         |
|----------|--------------|------------------|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TWY      | Width M (FT) | Bearing Strength | Surface          | Centre Line Points                                                                                                                                                      |
| A        | 21 (69)      | 120/R/C/W/T      | Concrete         | 55 54 30.90N 023 23 03.00E 55 54 28.80N 023 22 57.40E<br>55 54 25.30N 023 22 48.20E                                                                                     |
| B        | 23 (76)      | 59/F/A/W/T       | Asphalt-Concrete | 55 54 04.00N 023 23 13.00E 55 54 08.90N 023 23 19.40E<br>55 54 13.90N 023 23 25.80E 55 54 14.30N 023 23 29.30E<br>55 54 12.70N 023 23 35.10E 55 54 11.20N 023 23 40.90E |
| F        | 12 (39)      | 96/R/C/W/T       | Asphalt          | 55 52 45.10N 023 24 23.00E 55 52 45.60N 023 24 24.20E<br>55 52 46.20N 023 24 25.70E                                                                                     |
| G        | 24 (79)      | 120/R/C/W/T      | Asphalt-Concrete | 55 54 13.90N 023 22 36.70E 55 54 17.40N 023 22 39.90E<br>55 54 22.90N 023 22 44.80E                                                                                     |
| H        | 24 (79)      | 110/R/C/W/T      | Asphalt          | 55 53 58.70N 023 23 01.50E 55 54 00.70N 023 23 06.80E<br>55 54 02.30N 023 23 11.10E                                                                                     |
| I        | 14 (46)      | 120/R/C/W/T      | Asphalt          | 55 53 00.60N 023 24 11.00E 55 53 02.40N 023 24 15.70E<br>55 53 04.10N 023 24 20.10E                                                                                     |
| J        | 22 (72)      | 70/R/C/W/T       | Asphalt          | 55 52 47.00N 023 24 27.70E 55 52 48.50N 023 24 31.50E<br>55 52 50.30N 023 24 36.30E                                                                                     |
| K        | 12 (39)      | 74/R/C/W/T       | Asphalt          | 55 54 21.50N 023 21 58.30E 55 54 17.80N 023 22 14.50E<br>55 54 13.00N 023 22 34.50E                                                                                     |
| L        | 12 (39)      | 120/R/C/W/T      | Asphalt          | 55 54 21.10N 023 21 55.70E 55 54 17.50N 023 21 52.00E<br>55 54 14.70N 023 21 49.30E                                                                                     |
| M        | 23 (76)      | 65/F/D/X/T       | Asphalt          | 55 54 20.80N 023 21 56.90E 55 54 15.10N 023 21 59.50E<br>55 54 10.00N 023 22 01.80E                                                                                     |
| N        | 23 (76)      | 120/R/B/W/T      | Asphalt          | 55 53 56.00N 023 22 58.40E 55 53 56.80N 023 22 59.20E<br>55 53 57.80N 023 23 00.00E                                                                                     |
| O        | 23 (76)      | 120/R/B/W/T      | Asphalt          | 55 53 46.30N 023 23 09.60E 55 53 46.90N 023 23 11.20E                                                                                                                   |
| P        | 23 (76)      | 50/R/C/W/T       | Concrete         | 55 53 38.60N 023 23 18.20E 55 53 39.00N 023 23 19.20E<br>55 53 39.40N 023 23 20.30E                                                                                     |
| Q        | 23 (76)      | 50/R/C/W/T       | Concrete         | 55 53 26.20N 023 23 33.10E 55 53 26.60N 023 23 34.10E<br>55 53 27.00N 023 23 35.40E                                                                                     |

Changes: TWY M width, bearing strength.