

STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

TRANSITION ALT 5000


TWR	124.305
ATIS	127.805

PALANGA
RWY 01

 MANUX 1A, TIRIN 1A,
 VALUV 1A, XARIN 1A

For data tabulation see verso

Changes: VAR and date of VAR; MAG courses; MSA; lateral limits of SGZ Kartena.

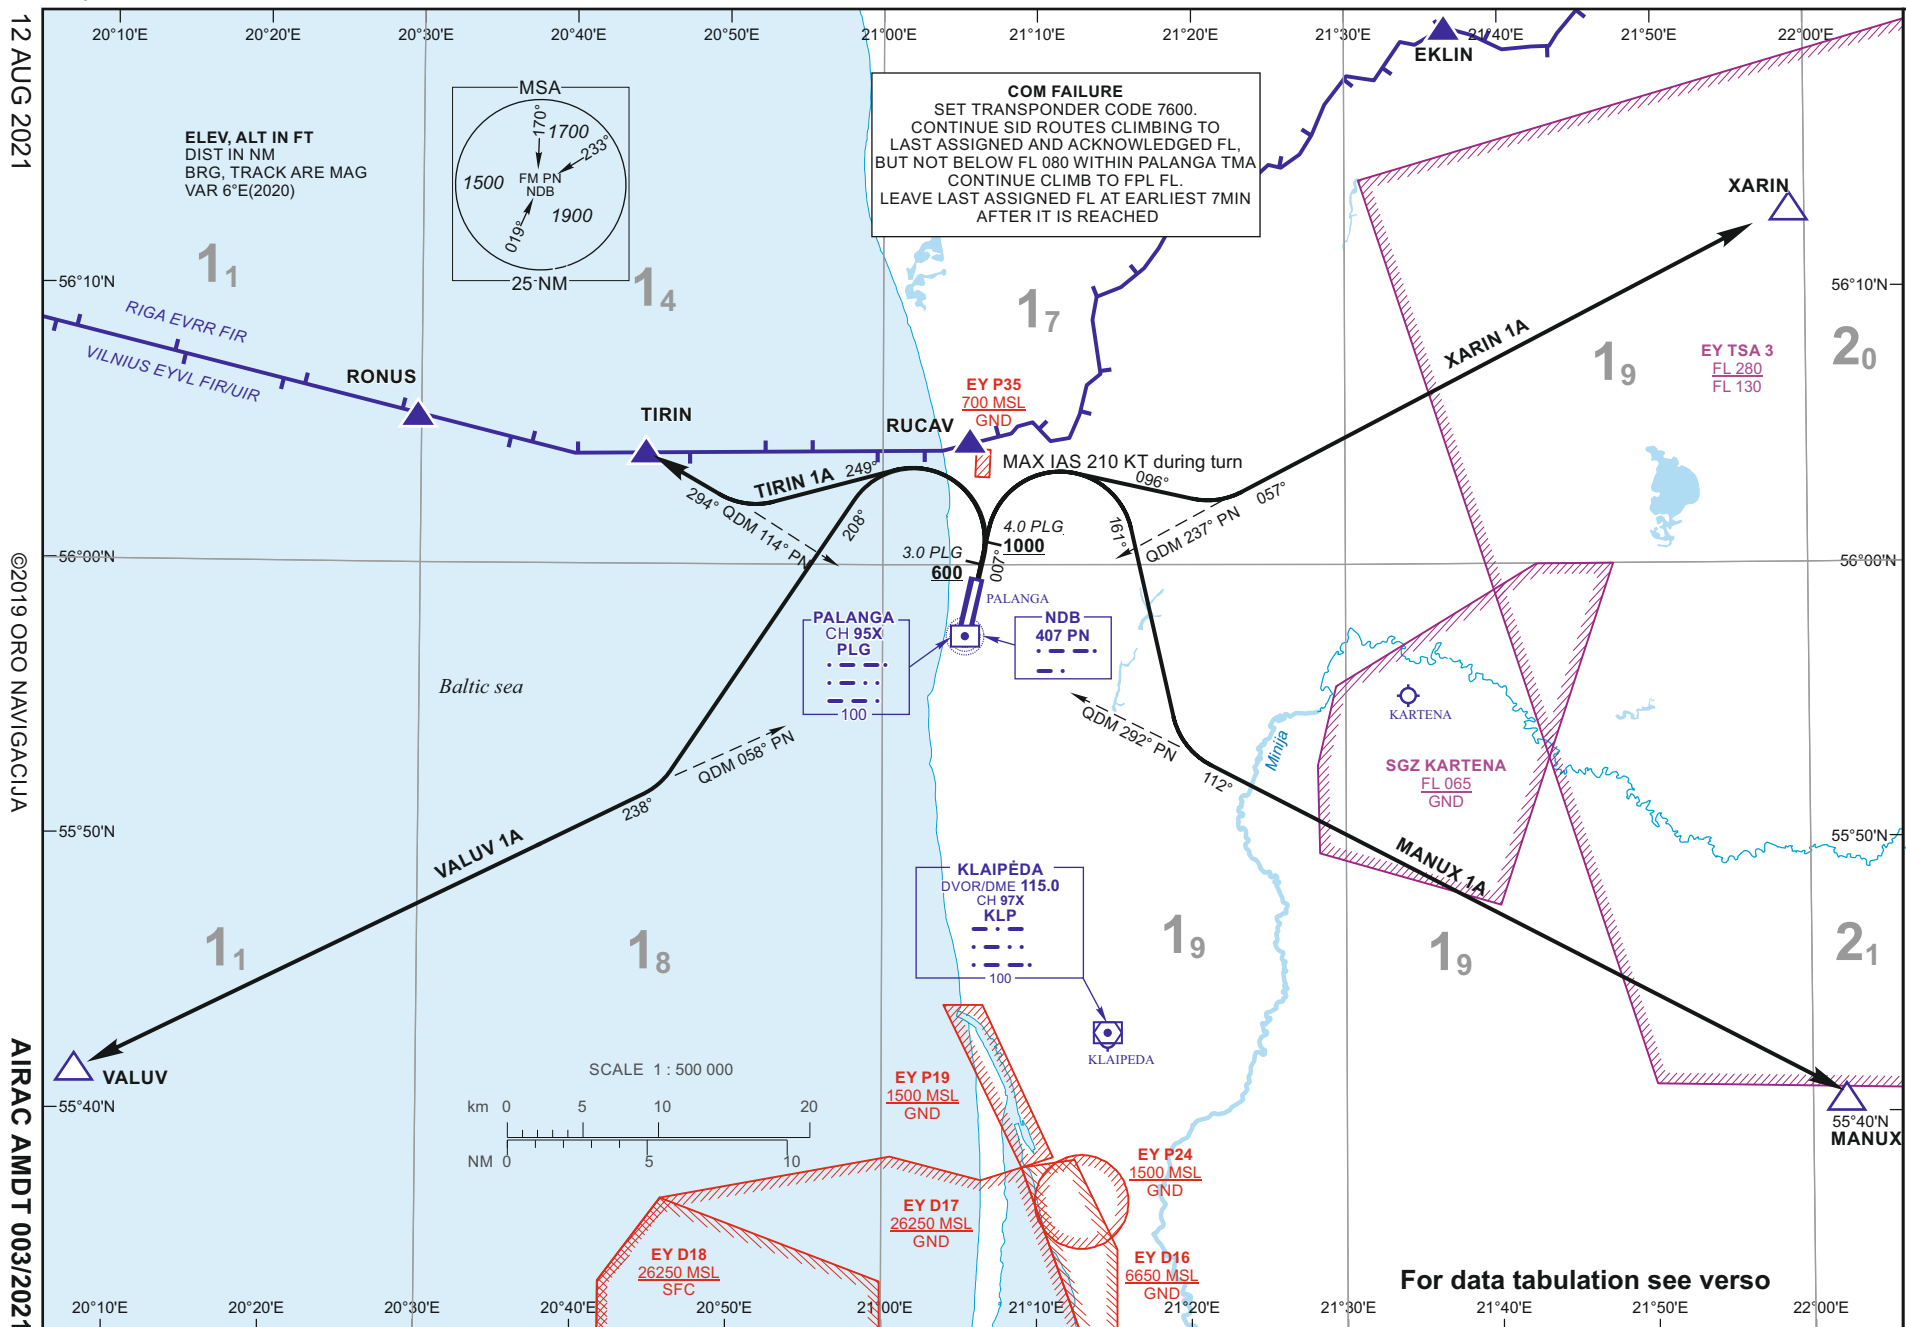

12 AUG 2021

©2019 ORO NAVIGACIJA

AIRAC AMDT 003/2021

PALANGA
SID RWY 01
TABULAR DESCRIPTION
STANDARD INSTRUMENT DEPARTURE (SID) ROUTES

SID NAME	ROUTE
MANUX 1A	Climb on RWY track to 4.0 DME PLG (at 1000 FT MSL or above). Turn right (MAX IAS 210 KT) to track 161°. Intercept QDM 292° PN, proceed to MANUX.
TIRIN 1A	Climb on RWY track to 3.0 DME PLG (at 600 FT MSL or above). Turn left (MAX IAS 210 KT) to track 249°. Intercept QDM 114° PN, proceed to TIRIN.
VALUV 1A	Climb on RWY track to 3.0 DME PLG (at 600 FT MSL or above). Turn left (MAX IAS 210 KT) to track 208°. Intercept QDM 058° PN, proceed to VALUV.
XARIN 1A	Climb on RWY track to 4.0 DME PLG (at 1000 FT MSL or above). Turn right (MAX IAS 210 KT) to track 096°. Intercept QDM 237° PN, proceed to XARIN.

Remark: 1. After take-off climb to 4000 FT MSL. Unless otherwise specified by ATC.
 2. PDG: 6.6%(400 FT/NM) up to 4000 FT MSL due to airspace.

WAYPOINT COORDINATES		
FIX/POINTS	COORDINATES	RADIAL/DISTANCE
MANUX	55 40 34.3N 022 02 08.2E	KLP R088.8/D27.0 ; PLG D36.3
TIRIN	56 04 02.2N 020 44 52.2E	KLP R315.9/D27.0 ; PLG D13.2
VALUV	55 41 31.7N 020 07 58.7E	KLP R262.4/D37.7 ; PLG D36.0
XARIN	56 12 56.9N 021 58 56.6E	KLP R033.4/D39.1 ; PLG D33.9
KLP	55 42 56.1N 021 14 37.4E	
PN	55 57 23.1N 021 05 13.5E	
PLG	55 57 23.5N 021 05 13.4E	

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYPA AD 2.22

Changes: MAG courses and radials from KLP.