

RNAV 1 (GNSS)
STANDARD ARRIVAL CHART
INSTRUMENT (STAR) - ICAO


TRANSITION ALT 5000

ATIS 127.805
TWR 124.305

PALANGA
RWY 19
MANUX 2B, TIRIN 2B,
VALUV 2B, XARIN 2B

For data tabulation see verso

Changes: VAR and date of VAR; MAG courses; MSA; lateral limits of SGZ Kartena; courses of HLDG NAPUS.

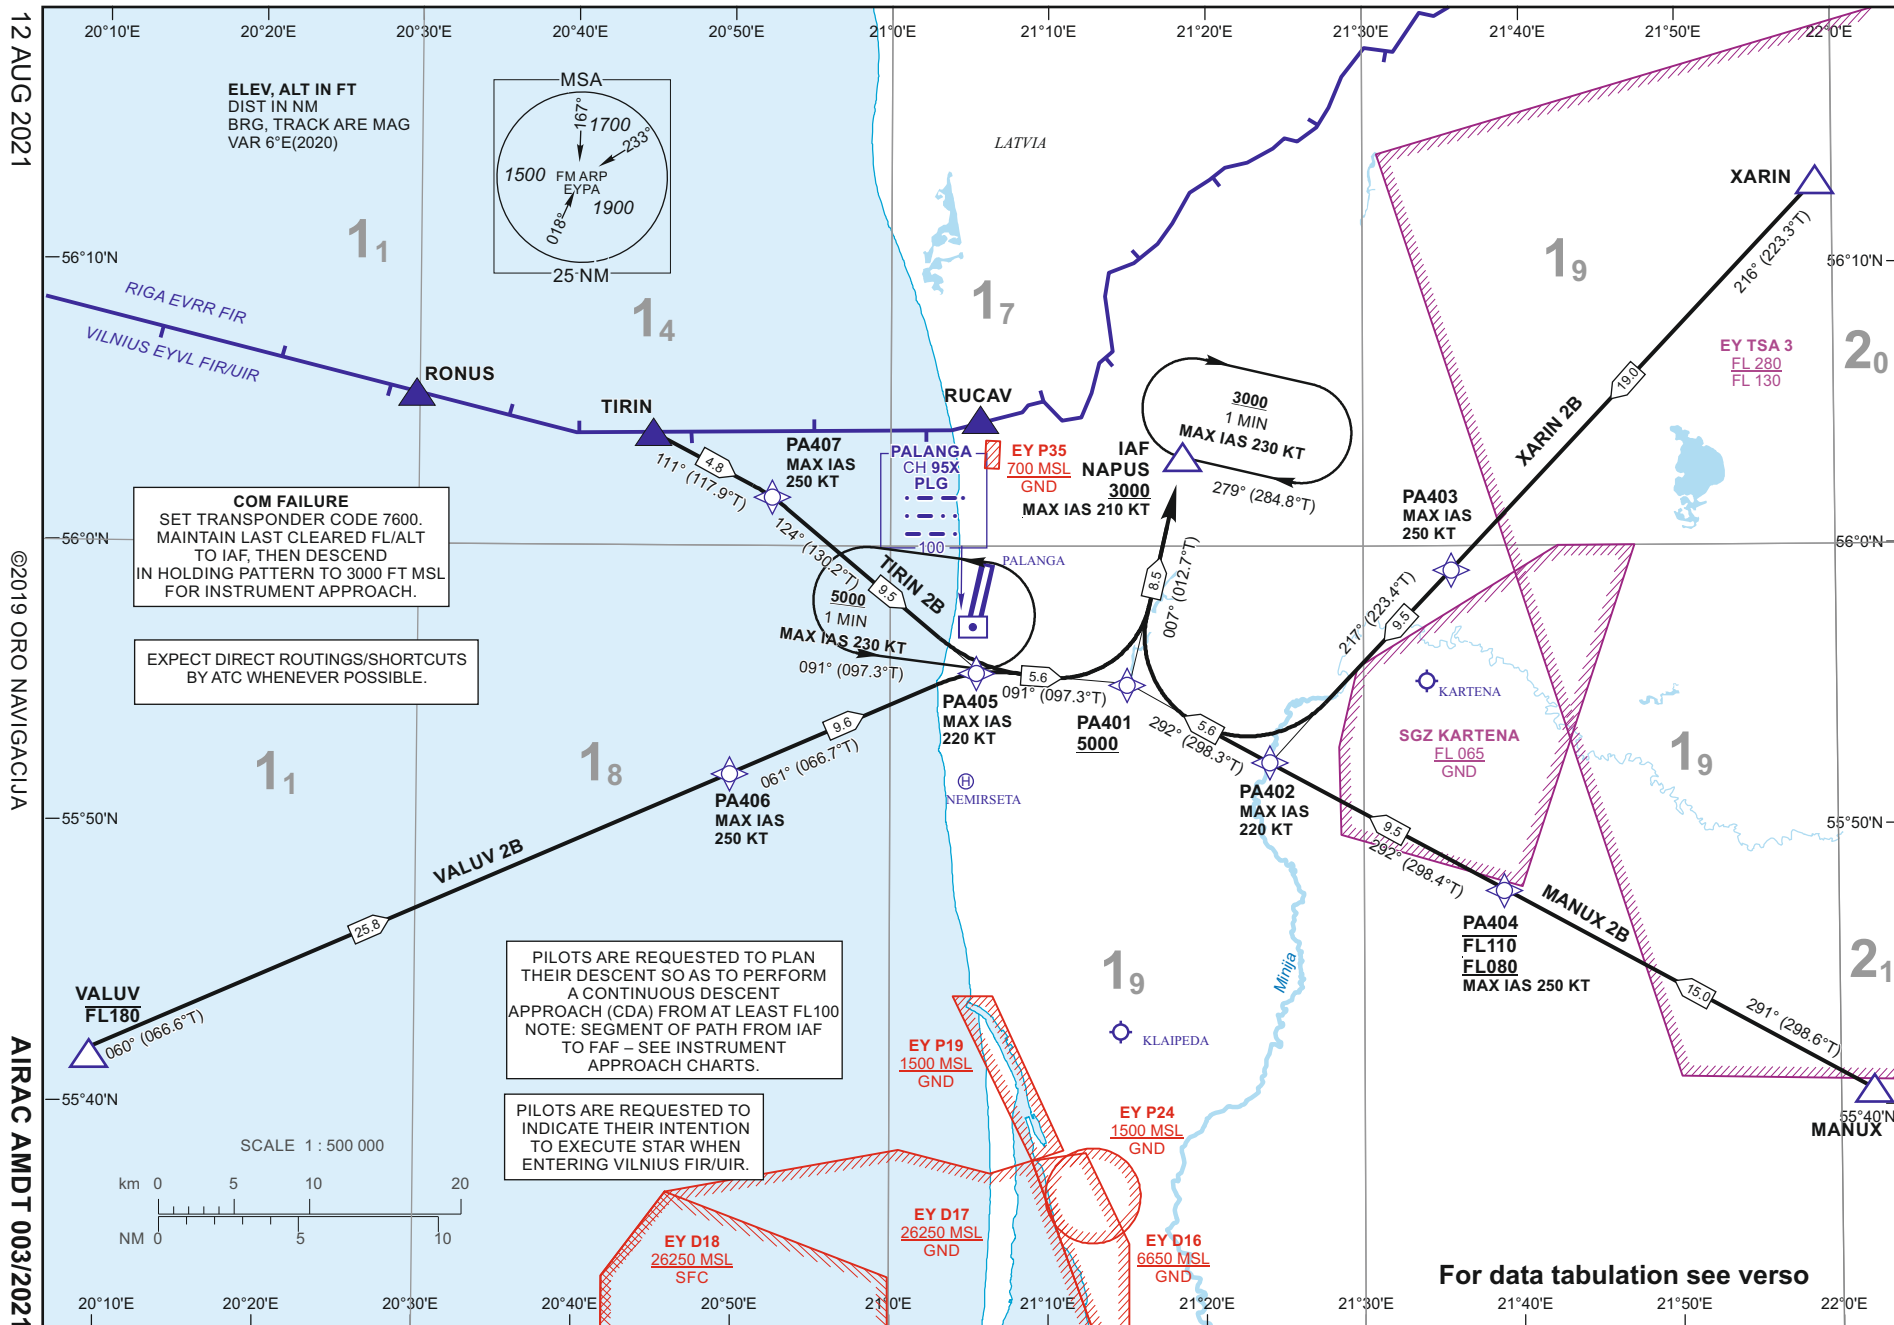

12 AUG 2021

©2019 ORO NAVIGACIJA

AIRAC AMDT 003/2021

PALANGA
RNAV 1 (GNSS) STAR
RWY 19

TABULAR DESCRIPTION

MANUX 2B

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)/ Time	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	IF	MANUX	—	—	-7,4	—	—	—	—	RNAV1
002	TF	PA404	—	291(298.6)	-7,4	15.0	—	-FL110/+FL080	-250	RNAV1
003	TF	PA402	—	292(298.4)	-5,9	9.5	—	—	-220	RNAV1
004	TF	PA401	—	292(298.3)	-5,9	5.6	—	+5000	—	RNAV1
005	TF	NAPUS	—	007(012.7)	-5,9	8.5	—	+3000	-210	RNAV1

TIRIN 2B

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)/ Time	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	IF	TIRIN	—	—	-7,1	—	—	—	—	RNAV1
002	TF	PA407	—	111(117.9)	-7,1	4.8	—	—	-250	RNAV1
003	TF	PA405	—	124(130.2)	-5,9	9.5	—	—	-220	RNAV1
004	TF	PA401	—	091(097.3)	-5,9	5.6	—	+5000	—	RNAV1
005	TF	NAPUS	—	007(012.7)	-5,9	8.5	—	+3000	-210	RNAV1

VALUV 2B

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)/ Time	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	IF	VALUV	—	—	-6,8	—	—	-FL180	—	RNAV1
002	TF	PA406	—	060(066.6)	-6,8	25.8	—	—	-250	RNAV1
003	TF	PA405	—	061(066.7)	-5,9	9.6	—	—	-220	RNAV1
004	TF	PA401	—	091(097.3)	-5,9	5.6	—	+5000	—	RNAV1
005	TF	NAPUS	—	007(012.7)	-5,9	8.5	—	+3000	-210	RNAV1

XARIN 2B

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)/ Time	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	IF	XARIN	—	—	-7,5	—	—	—	—	RNAV1
002	TF	PA403	—	216(223.3)	-7,5	19.0	—	—	-250	RNAV1
003	TF	PA402	—	217(223.4)	-5,9	9.5	—	—	-220	RNAV1
004	TF	PA401	—	292(298.3)	-5,9	5.6	—	+5000	—	RNAV1
005	TF	NAPUS	—	007(012.7)	-5,9	8.5	—	+3000	-210	RNAV1

HOLDINGS IDENTIFICATION

Holding fix	Geographical coordinates	Inbound track °M(°T)	Magnetic Variation	Outbound distance (NM)/ Time	Turn Direction	Minimum/Maximum holding altitude (FT)/Flight level	Speed (KT)
NAPUS	56 03 12.1N 021 18 32.7E	279(284.8)	-5,9	1 min	R	+3000	-230
PA405	55 55 40.5N 021 05 23.3E	091(097.3)	-5,9	1 min	L	+5000	-230

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYPA AD 2.22

Changes: MAG VAR and MAG courses; courses of HLDG NAPUS.

PALANGA
RNAV 1 (GNSS) STAR
RWY 19

TABULAR DESCRIPTION

WAYPOINT COORDINATES					
FIX/POINTS	COORDINATES	FIX/POINTS	COORDINATES	FIX/POINTS	COORDINATES
PA401	55 54 58.5N 021 15 14.2E	PA406	55 51 53.1N 020 49 47.8E	TIRIN	56 04 02.2N 020 44 52.2E
PA402	55 52 18.9N 021 24 00.0E	PA407	56 01 48.3N 020 52 24.1E	VALUV	55 41 31.7N 020 07 58.7E
PA403	55 59 09.2N 021 35 34.0E	MANUX	55 40 34.3N 022 02 08.2E	XARIN	56 12 56.9N 021 58 56.6E
PA404	55 47 46.2N 021 38 52.4E	NAPUS	56 03 12.1N 021 18 32.7E	PLG	55 57 23.5N 021 05 13.4E
PA405	55 55 40.5N 021 05 23.3E				

THIS PAGE INTENTIONALLY LEFT BLANK