


RNAV 1 (GNSS)
STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

TRANSITION ALT 5000

TWR 124.305
ATIS 127.805PALANGA
RWY 01
ASKOR 1C, MANUX 1C,
TIRIN 1C, VALUV 1C, XARIN 1C

Changes: VAR and date of VAR; MAG courses; MSA; lateral limits of SGZ Kartena.

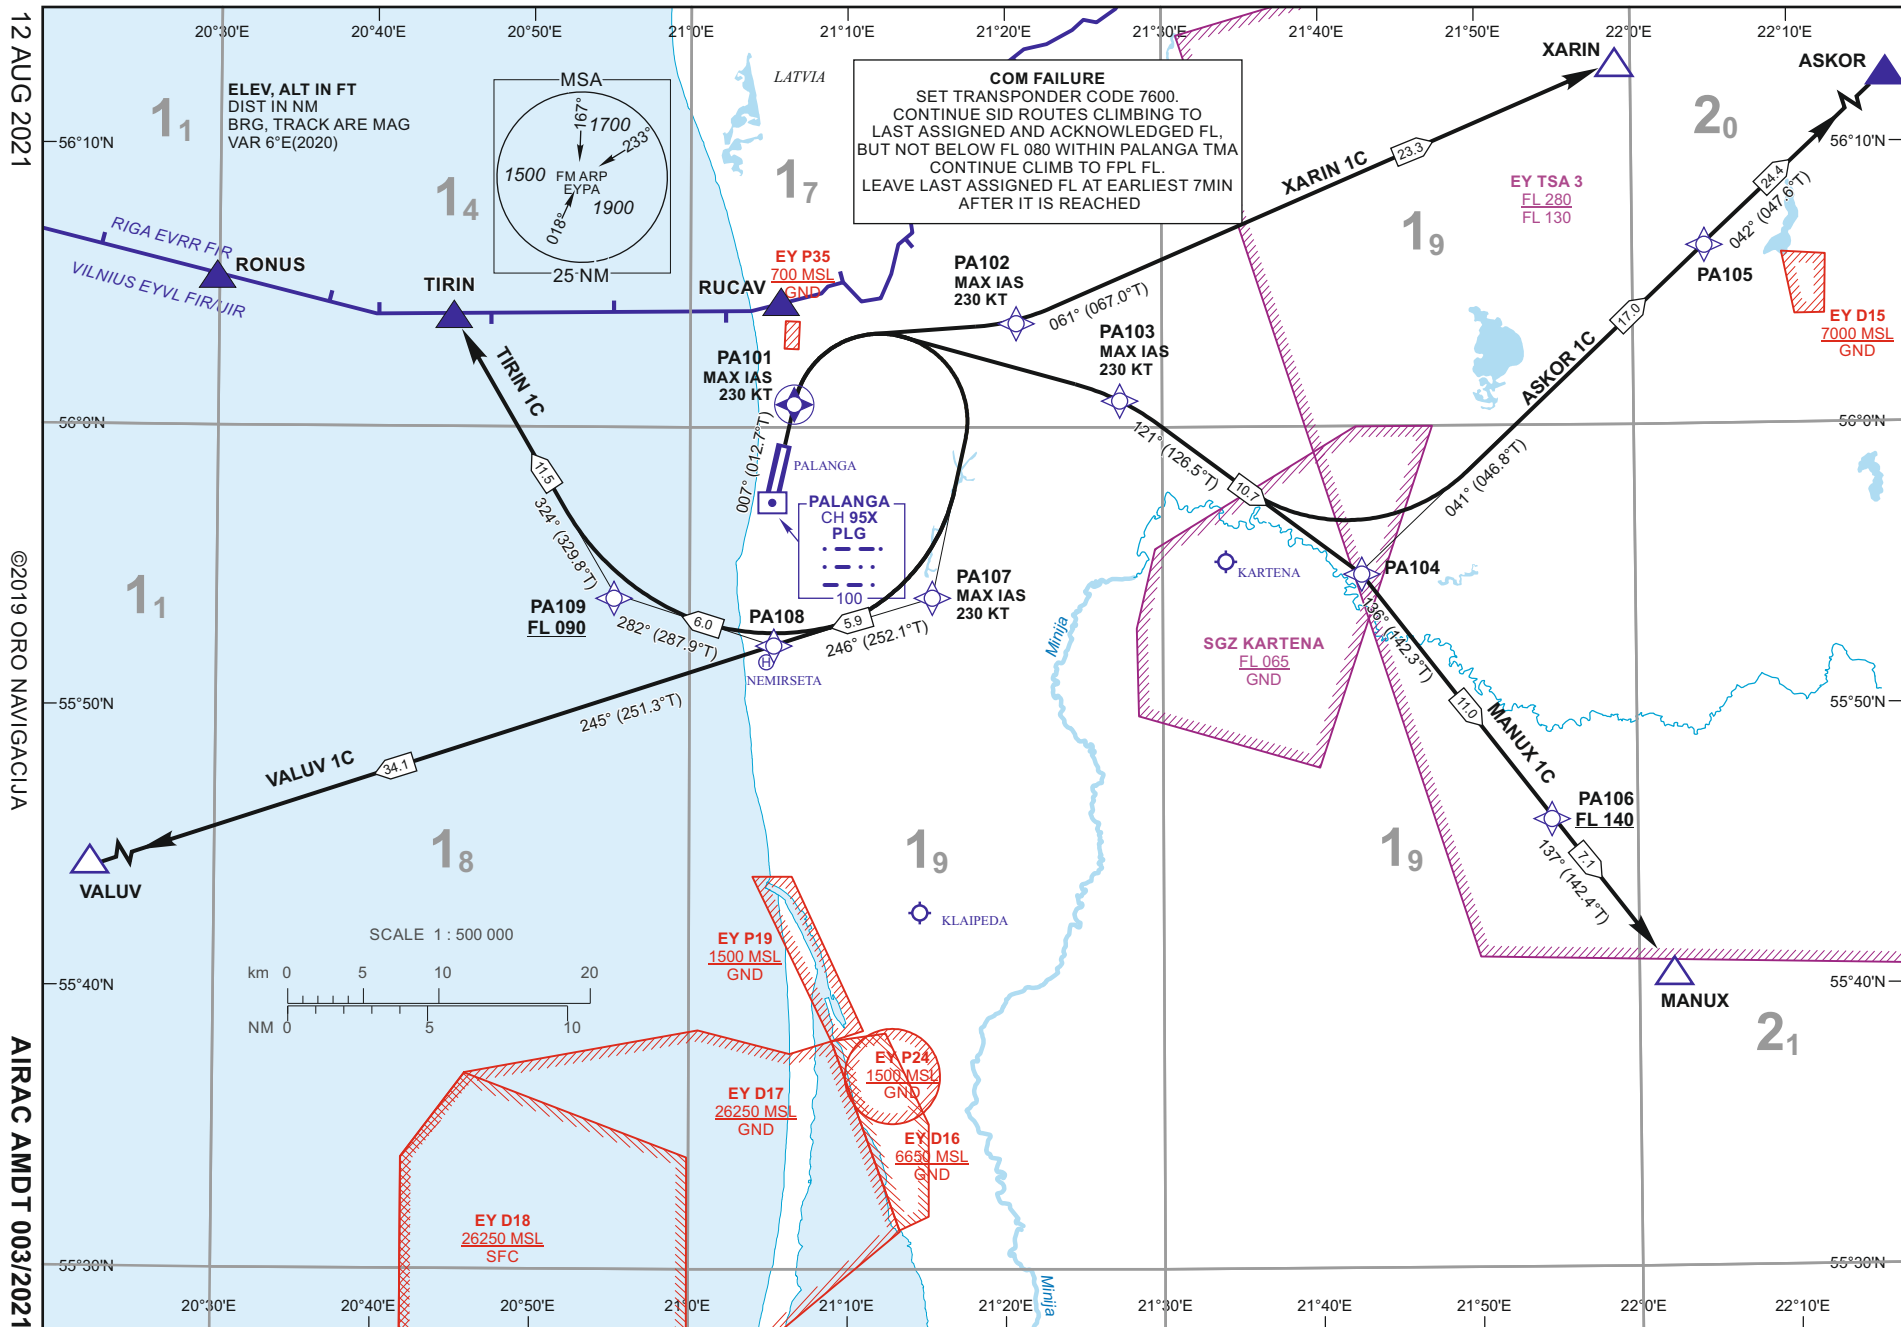

PALANGA

RNAV 1 (GNSS) SID

RWY 01

TABULAR DESCRIPTION

ASKOR 1C PDG 7.7% REQUIRED DUE TO OPERATIONAL REASONS UNTIL PA103

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	PA101	Y	007(012.7)	-5,9	2.0	—	—	-230	RNAV1
002	DF	PA103	—	—	-5,9	—	R	—	-230	RNAV1
003	TF	PA104	—	121(126.5)	-5,9	10.7	—	—	—	RNAV1
004	TF	PA105	—	041(046.8)	-5,9	17.0	—	—	—	RNAV1
005	TF	ASKOR	—	042(047.6)	-5,9	24.4	—	—	—	RNAV1

MANUX 1C PDG 7.7% REQUIRED DUE TO OPERATIONAL REASONS UNTIL PA103

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	PA101	Y	007(012.7)	-5,9	2.0	—	—	-230	RNAV1
002	DF	PA103	—	—	-5,9	—	R	—	-230	RNAV1
003	TF	PA104	—	121(126.5)	-5,9	10.7	—	—	—	RNAV1
004	TF	PA106	—	136(142.3)	-5,9	11.0	—	+FL140	—	RNAV1
005	TF	MANUX	—	137(142.4)	-5,9	7.1	—	—	—	RNAV1

TIRIN 1C PDG 7.7% REQUIRED DUE TO OPERATIONAL REASONS UNTIL PA107

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	PA101	Y	007(012.7)	-5,9	2.0	—	—	-230	RNAV1
002	DF	PA107	—	—	-5,9	—	R	—	-230	RNAV1
003	TF	PA108	—	246(252.1)	-5,9	5.9	—	—	—	RNAV1
004	TF	PA109	—	282(287.9)	-5,9	6.0	—	+FL090	—	RNAV1
005	TF	TIRIN	—	324(329.8)	-5,9	11.5	—	—	—	RNAV1

VALUV 1C PDG 7.7% REQUIRED DUE TO OPERATIONAL REASONS UNTIL PA107

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	PA101	Y	007(012.7)	-5,9	2.0	—	—	-230	RNAV1
002	DF	PA107	—	—	-5,9	—	R	—	-230	RNAV1
003	TF	PA108	—	246(252.1)	-5,9	5.9	—	—	—	RNAV1
004	TF	VALUV	—	245(251.3)	-5,9	34.1	—	—	—	RNAV1

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYPAAD 2.22

Changes: MAG VAR and MAG courses.

PALANGA

RNAV 1 (GNSS) SID

RWY 01

TABULAR DESCRIPTION

XARIN 1C PDG 7.7% REQUIRED DUE TO OPERATIONAL REASONS UNTIL PA101										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	PA101	Y	007(012.7)	-5,9	2.0	—	—	-230	RNAV1
002	DF	PA102	—	—	-5,9	—	R	—	-230	RNAV1
003	TF	XARIN	—	061(067.0)	-5,9	23.3	—	—	—	RNAV1

WAYPOINT COORDINATES			
FIX/POINTS	COORDINATES	FIX/POINTS	COORDINATES
PA101	56 00 55.9N 021 06 39.3E	ASKOR	56 22 58.0N 022 36 46.0E
PA102	56 03 45.6N 021 20 40.3E	MANUX	55 40 34.3N 022 02 08.2E
PA103	56 01 09.3N 021 27 16.5E	TIRIN	56 04 02.2N 020 44 52.2E
PA104	55 54 49.1N 021 42 34.6E	VALUV	55 41 31.7N 020 07 58.7E
PA105	56 06 27.9N 022 04 35.9E	XARIN	56 12 56.9N 021 58 56.6E
PA106	55 46 08.4N 021 54 31.4E	PLG	55 57 23.5N 021 05 13.4E
PA107	55 54 02.9N 021 15 22.2E		
PA108	55 52 13.8N 021 05 19.4E		
PA109	55 54 04.4N 020 55 11.3E		

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYPA AD 2.22

Changes: MAG VAR and MAG courses.

THIS PAGE INTENTIONALLY LEFT BLANK