


RNAV 1 (GNSS, DME/DME)
STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

TWR 118.205
APP 120.705
ATIS 125.805

TRANSITION ALT 5000

**VILNIUS
RWY 19**

DUKAT 1B, IKAMU 1B, LAFAT 1B, MURUN 1B,
NEDAM 1B, SOGBI 1B, TAGOL 1B, UPASI 1B, UTENU 1B

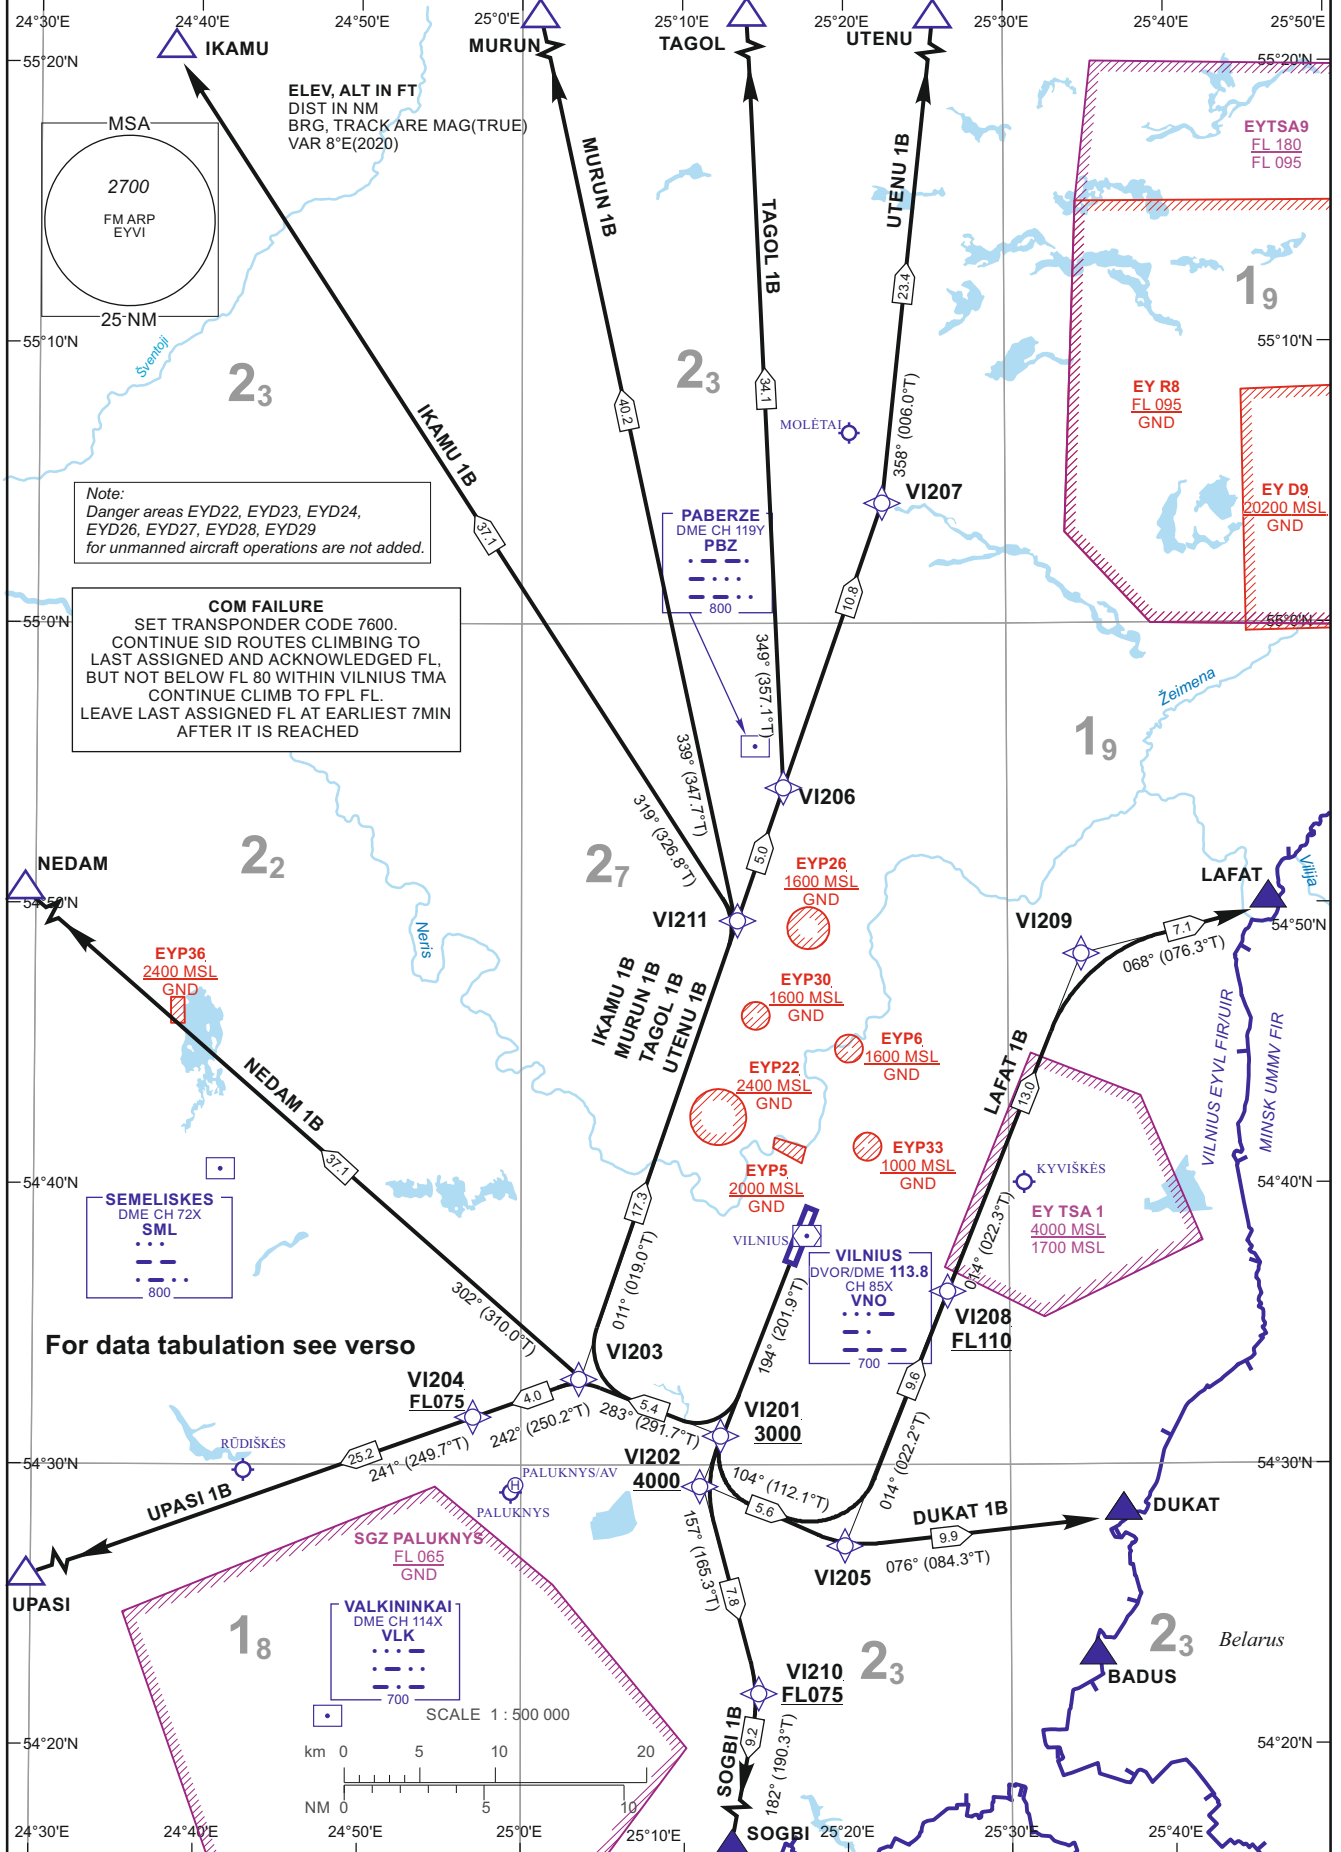

For data tabulation see verso

Changes: EYP27 withdrawn; note and EYDSA9 added; lateral limits of EYP26; AMA.

03 NOV 2022

©2019 ORO NAVIGACIJA

AIRAC AMDT 004/2022

VILNIUS

RNAV 1 (GNSS, DME/DME) SID

RWY 19

TABULAR DESCRIPTION

DUKAT 1B PDG 6.6% REQUIRED DUE TO OPERATIONAL REASONS UNTIL VI202

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	VI202	—	194(201.9)	8.3	8.5	—	+4000	—	RNAV1
002	TF	VI205	—	104(112.1)	8.3	5.6	—	—	—	RNAV1
003	TF	DUKAT	—	076(084.3)	8.3	9.9	—	—	—	RNAV1

IKAMU 1B PDG 6.6% REQUIRED DUE TO OPERATIONAL REASONS UNTIL VI201

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	VI201	—	194(201.9)	8.3	6.7	—	+3000	—	RNAV1
002	TF	VI203	—	283(291.7)	8.3	5.4	—	—	—	RNAV1
003	TF	VI211	—	011(019.0)	8.3	17.3	—	—	—	RNAV1
004	TF	IKAMU	—	319(326.8)	8.3	37.1	—	—	—	RNAV1

LAFAT 1B PDG 6.6% REQUIRED DUE TO OPERATIONAL REASONS UNTIL VI202

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	VI202	—	194(201.9)	8.3	8.5	—	+4000	—	RNAV1
002	TF	VI205	—	104(112.1)	8.3	5.6	—	—	—	RNAV1
003	TF	VI208	—	014(022.2)	8.3	9.6	—	+FL110	—	RNAV1
004	TF	VI209	—	014(022.3)	8.3	13.0	—	—	—	RNAV1
005	TF	LAFAT	—	068(076.3)	8.3	7.1	—	—	—	RNAV1

MURUN 1B PDG 6.6% REQUIRED DUE TO OPERATIONAL REASONS UNTIL VI201

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	VI201	—	194(201.9)	8.3	6.7	—	+3000	—	RNAV1
002	TF	VI203	—	283(291.7)	8.3	5.4	—	—	—	RNAV1
003	TF	VI211	—	011(019.0)	8.3	17.3	—	—	—	RNAV1
004	TF	MURUN	—	339(347.7)	8.3	40.2	—	—	—	RNAV1

NEDAM 1B PDG 6.6% REQUIRED DUE TO OPERATIONAL REASONS UNTIL VI201

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	VI201	—	194(201.9)	8.3	6.7	—	+3000	—	RNAV1
002	TF	VI203	—	283(291.7)	8.3	5.4	—	—	—	RNAV1
003	TF	NEDAM	—	302(310.0)	8.3	37.1	—	—	—	RNAV1

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYVI AD 2.22

Changes: MAG VAR.

VILNIUS**RNAV 1** (GNSS, DME/DME) **SID****RWY 19****TABULAR DESCRIPTION****SOGBI 1B** PDG 6.6% REQUIRED DUE TO OPERATIONAL REASONS UNTIL VI202

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	VI202	—	194(201.9)	8.3	8.5	—	+4000	—	RNAV1
002	TF	VI210	—	157(165.3)	8.3	7.8	—	+FL075	—	RNAV1
003	TF	SOGBI	—	182(190.3)	8.3	9.2	—	—	—	RNAV1

TAGOL 1B PDG 6.6% REQUIRED DUE TO OPERATIONAL REASONS UNTIL VI201

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	VI201	—	194(201.9)	8.3	6.7	—	+3000	—	RNAV1
002	TF	VI203	—	283(291.7)	8.3	5.4	—	—	—	RNAV1
003	TF	VI206	—	011(019.0)	8.3	22.3	—	—	—	RNAV1
004	TF	TAGOL	—	349(357.1)	8.3	34.1	—	—	—	RNAV1

UPASI 1B PDG 6.6% REQUIRED DUE TO OPERATIONAL REASONS UNTIL VI201

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	VI201	—	194(201.9)	8.3	6.7	—	+3000	—	RNAV1
002	TF	VI203	—	283(291.7)	8.3	5.4	—	—	—	RNAV1
003	TF	VI204	—	242(250.2)	8.3	4.0	—	+FL075*	—	RNAV1
004	TF	UPASI	—	241(249.7)	8.3	25.2	—	—	—	RNAV1

UTENU 1B PDG 6.6% REQUIRED DUE TO OPERATIONAL REASONS UNTIL VI201

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	VI201	—	194(201.9)	8.3	6.7	—	+3000	—	RNAV1
002	TF	VI203	—	283(291.7)	8.3	5.4	—	—	—	RNAV1
003	TF	VI207	—	011(019.0)	8.3	33.1	—	—	—	RNAV1
004	TF	UTENU	—	358(006.0)	8.3	23.4	—	—	—	RNAV1

Note: *Unless otherwise instructed by ATC

Passing 2500 FT MSL contact with Vilnius APP Channel 120.705

WAYPOINT COORDINATES

FIX/POINTS	COORDINATES	FIX/POINTS	COORDINATES	FIX/POINTS	COORDINATES
VI201	54 31 12.1N 025 12 25.5E	VI210	54 21 51.7N 025 14 34.7E	TAGOL	55 28 16.8N 025 13 17.4E
VI202	54 29 23.5N 025 11 10.3E	VI211	54 49 34.9N 025 13 24.9E	UPASI	54 23 12.1N 024 16 37.3E
VI203	54 33 12.1N 025 03 43.9E	DUKAT	54 28 17.3N 025 36 55.2E	UTENU	55 27 42.8N 025 26 36.0E
VI204	54 31 50.7N 024 57 14.2E	IKAMU	55 20 40.3N 024 38 12.5E	PBZ	54 55 38.0N 025 14 23.0E
VI205	54 27 17.5N 025 20 04.1E	LAFAT	54 49 52.0N 025 46 43.0E	SML	54 40 31.2N 024 41 32.4E
VI206	54 54 19.1N 025 16 14.4E	MURUN	55 28 46.6N 024 58 40.1E	VLK	54 21 02.9N 024 48 13.2E
VI207	55 04 28.0N 025 22 20.1E	NEDAM	54 57 10.4N 024 14 51.1E	VNO	54 38 09.8N 025 17 37.1E
VI208	54 36 10.0N 025 26 17.1E	SOGBI	54 12 47.0N 025 11 45.0E		
VI209	54 48 10.6N 025 34 46.6E				

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYVI AD 2.22

Changes: MAG VAR.

THIS PAGE INTENTIONALLY LEFT BLANK