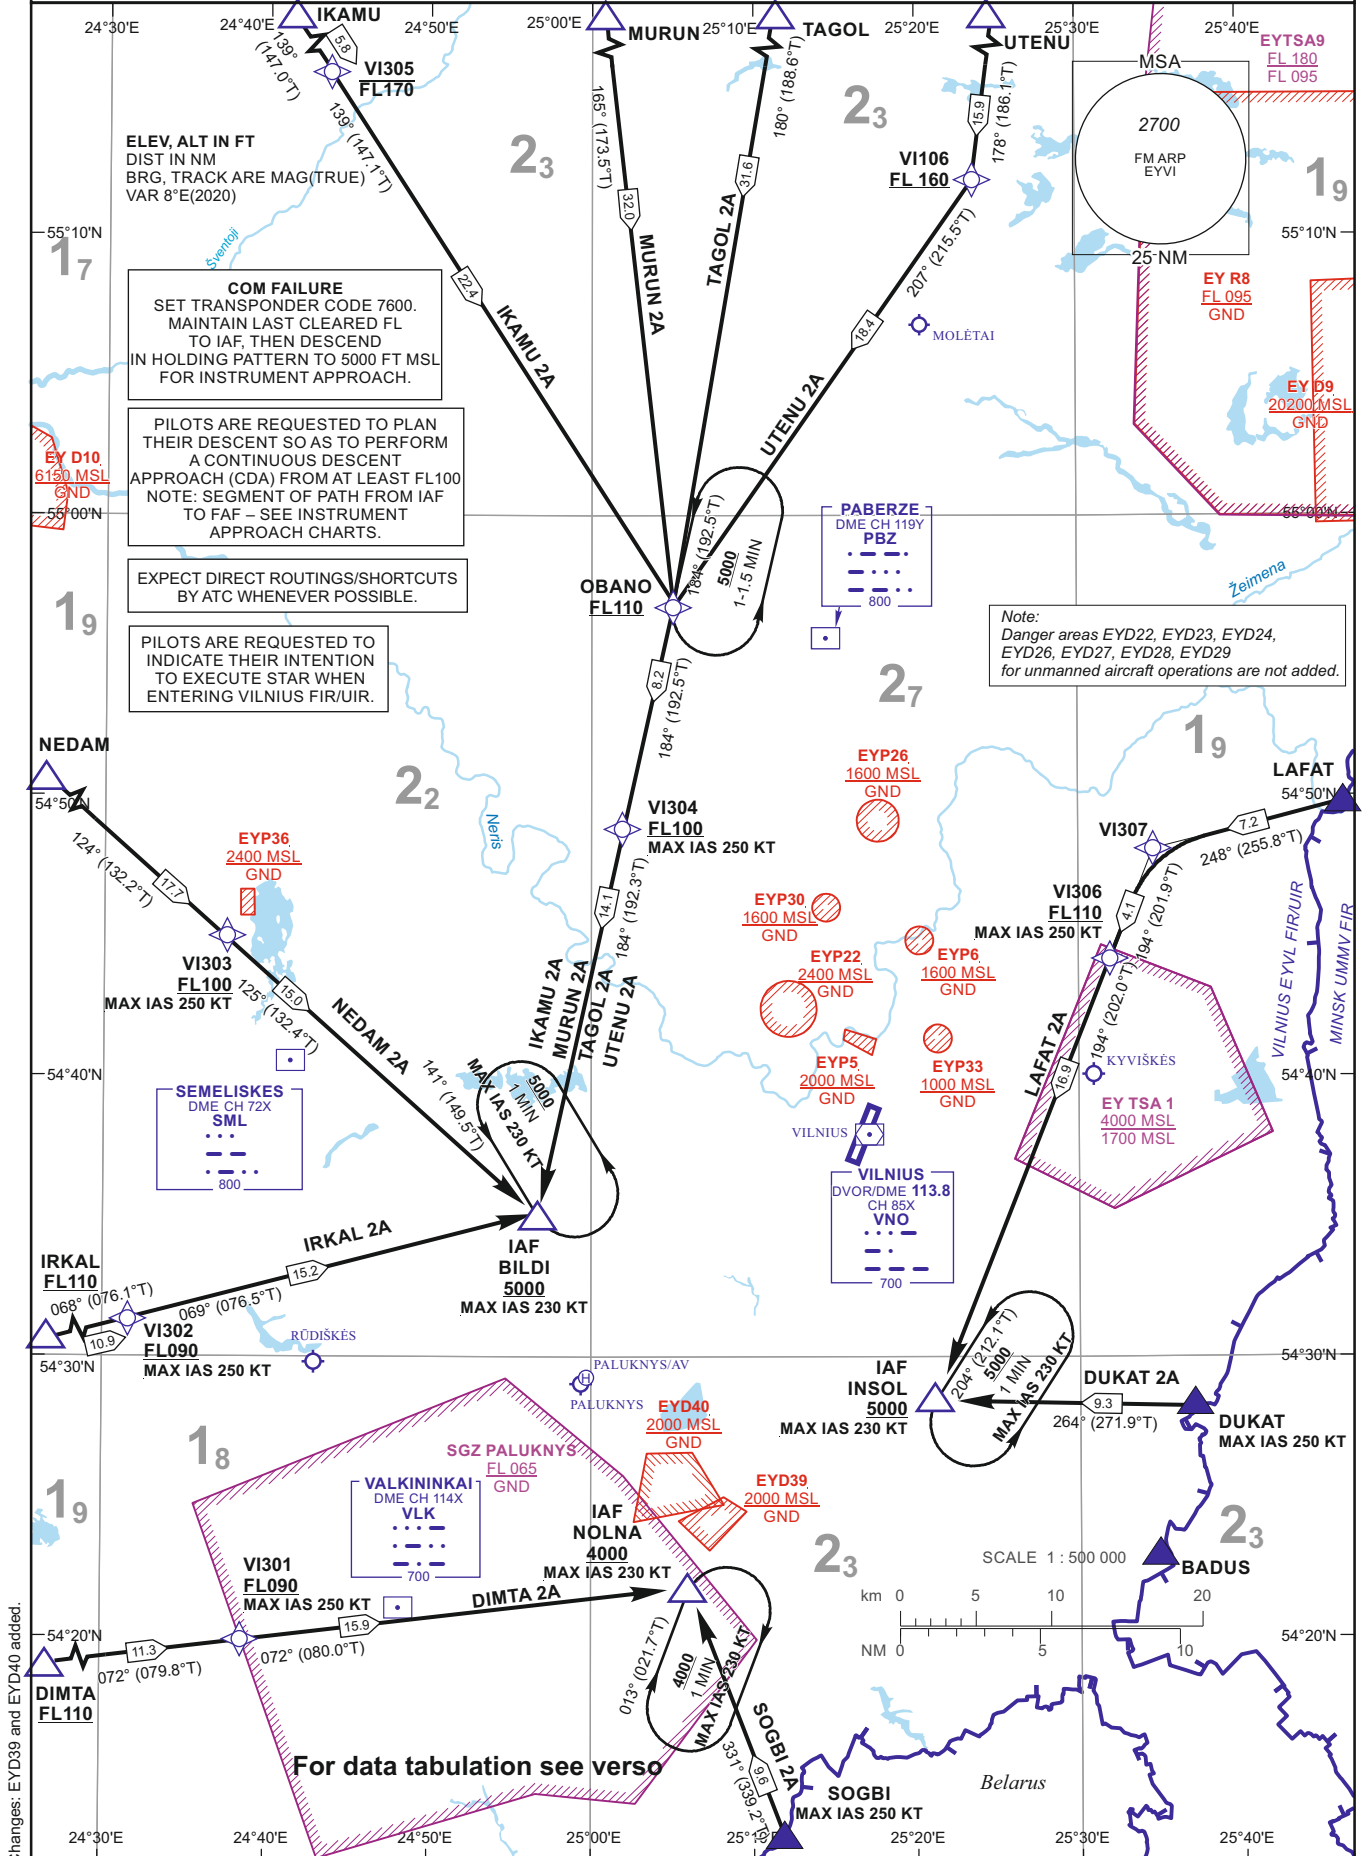


**RNAV 1 (GNSS, DME/DME)  
STANDARD ARRIVAL CHART  
INSTRUMENT (STAR) - ICAO**

 ATIS 125.805  
 APP 120.705  
 TWR 118.205

TRANSITION ALT 5000

**VILNIUS  
RWY 01**

 DIMTA 2A, DUKAT 2A, IKAMU 2A, IRKAL 2A, LAFAT 2A,  
 MURUN 2A, NEDAM 2A, SOGBI 2A, TAGOL 2A, UTENU 2A


## VILNIUS

RNAV 1 (GNSS, DME/DME) STAR

RWY 01

## TABULAR DESCRIPTION

**DIMTA 2A** During activity time of Paluknys SGZ expect rerouting by ATC.

| Serial Number | Path Descriptor | Waypoint Identifier | Fly-over | Course/Track °M(°T) | Magnetic Variation | Distance (NM)/ Time | Turn Direction | Altitude (FT)/ Flight level | Speed (KT) | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------------|--------------------|---------------------|----------------|-----------------------------|------------|--------------------------|
| 001           | IF              | DIMTA               | —        | —                   | 7.7                | —                   | —              | +FL110                      | —          | RNAV1                    |
| 002           | TF              | VI301               | —        | 072(079.8)          | 7.7                | 11.3                | —              | +FL090                      | -250       | RNAV1                    |
| 003           | TF              | NOLNA               | —        | 072(080.0)          | 8.3                | 15.9                | —              | +4000                       | -230       | RNAV1                    |

**DUKAT 2A**

| Serial Number | Path Descriptor | Waypoint Identifier | Fly-over | Course/Track °M(°T) | Magnetic Variation | Distance (NM)/ Time | Turn Direction | Altitude (FT)/ Flight level | Speed (KT) | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------------|--------------------|---------------------|----------------|-----------------------------|------------|--------------------------|
| 001           | IF              | DUKAT               | —        | —                   | 8.1                | —                   | —              | —                           | -250       | RNAV1                    |
| 002           | TF              | INSOL               | —        | 264(271.9)          | 8.3                | 9.3                 | —              | +5000                       | -230       | RNAV1                    |

**IKAMU 2A**

| Serial Number | Path Descriptor | Waypoint Identifier | Fly-over | Course/Track °M(°T) | Magnetic Variation | Distance (NM)/ Time | Turn Direction | Altitude (FT)/ Flight level | Speed (KT) | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------------|--------------------|---------------------|----------------|-----------------------------|------------|--------------------------|
| 001           | IF              | IKAMU               | —        | —                   | 8.0                | —                   | —              | —                           | —          | RNAV1                    |
| 002           | TF              | VI305               | —        | 139(147.0)          | 8.0                | 5.8                 | —              | -FL170                      | —          | RNAV1                    |
| 003           | TF              | OBANO               | —        | 139(147.1)          | 8.3                | 22.4                | —              | +FL110                      | —          | RNAV1                    |
| 004           | TF              | VI304               | —        | 184(192.5)          | 8.3                | 8.2                 | —              | +FL100                      | -250       | RNAV1                    |
| 005           | TF              | BILDI               | —        | 184(192.3)          | 8.3                | 14.1                | —              | +5000                       | -230       | RNAV1                    |

**IRKAL 2A**

| Serial Number | Path Descriptor | Waypoint Identifier | Fly-over | Course/Track °M(°T) | Magnetic Variation | Distance (NM)/ Time | Turn Direction | Altitude (FT)/ Flight level | Speed (KT) | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------------|--------------------|---------------------|----------------|-----------------------------|------------|--------------------------|
| 001           | IF              | IRKAL               | —        | —                   | 7.7                | —                   | —              | +FL110                      | —          | RNAV1                    |
| 002           | TF              | VI302               | —        | 068(076.1)          | 7.7                | 10.9                | —              | +FL090                      | -250       | RNAV1                    |
| 003           | TF              | BILDI               | —        | 069(076.5)          | 8.3                | 15.2                | —              | +5000                       | -230       | RNAV1                    |

**LAFAT 2A**

| Serial Number | Path Descriptor | Waypoint Identifier | Fly-over | Course/Track °M(°T) | Magnetic Variation | Distance (NM)/ Time | Turn Direction | Altitude (FT)/ Flight level | Speed (KT) | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------------|--------------------|---------------------|----------------|-----------------------------|------------|--------------------------|
| 001           | IF              | LAFAT               | —        | —                   | 8.2                | —                   | —              | —                           | —          | RNAV1                    |
| 002           | TF              | VI307               | —        | 248(255.8)          | 8.3                | 7.2                 | —              | —                           | —          | RNAV1                    |
| 003           | TF              | VI306               | —        | 194(201.9)          | 8.3                | 4.1                 | —              | +FL110                      | -250       | RNAV1                    |
| 004           | TF              | INSOL               | —        | 194(202.0)          | 8.3                | 16.9                | —              | +5000                       | -230       | RNAV1                    |

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYVI AD 2.22

Changes: MAG VAR.

**VILNIUS****RNAV 1** (GNSS, DME/DME) **STAR****RWY 01****TABULAR DESCRIPTION****MURUN 2A**

| Serial Number | Path Descriptor | Waypoint Identifier | Fly-over | Course/Track °M(°T) | Magnetic Variation | Distance (NM)/ Time | Turn Direction | Altitude (FT)/ Flight level | Speed (KT) | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------------|--------------------|---------------------|----------------|-----------------------------|------------|--------------------------|
| 001           | IF              | MURUN               | —        | —                   | 8.2                | —                   | —              | —                           | —          | RNAV1                    |
| 002           | TF              | OBANO               | —        | 165(173.5)          | 8.3                | 32.0                | —              | +FL110                      | —          | RNAV1                    |
| 003           | TF              | VI304               | —        | 184(192.5)          | 8.3                | 8.2                 | —              | +FL100                      | -250       | RNAV1                    |
| 004           | TF              | BILDI               | —        | 184(192.3)          | 8.3                | 14.1                | —              | +5000                       | -230       | RNAV1                    |

**NEDAM 2A**

| Serial Number | Path Descriptor | Waypoint Identifier | Fly-over | Course/Track °M(°T) | Magnetic Variation | Distance (NM)/ Time | Turn Direction | Altitude (FT)/ Flight level | Speed (KT) | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------------|--------------------|---------------------|----------------|-----------------------------|------------|--------------------------|
| 001           | IF              | NEDAM               | —        | —                   | 7.8                | —                   | —              | —                           | —          | RNAV1                    |
| 002           | TF              | VI303               | —        | 124(132.2)          | 7.9                | 17.7                | —              | +FL100                      | -250       | RNAV1                    |
| 003           | TF              | BILDI               | —        | 125(132.4)          | 8.3                | 15.0                | —              | +5000                       | -230       | RNAV1                    |

**SOGBI 2A**

| Serial Number | Path Descriptor | Waypoint Identifier | Fly-over | Course/Track °M(°T) | Magnetic Variation | Distance (NM)/ Time | Turn Direction | Altitude (FT)/ Flight level | Speed (KT) | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------------|--------------------|---------------------|----------------|-----------------------------|------------|--------------------------|
| 001           | IF              | SOGBI               | —        | —                   | 7.9                | —                   | —              | —                           | -250       | RNAV1                    |
| 002           | TF              | NOLNA               | —        | 331(339.2)          | 8.3                | 9.6                 | —              | +4000                       | -230       | RNAV1                    |

**TAGOL 2A**

| Serial Number | Path Descriptor | Waypoint Identifier | Fly-over | Course/Track °M(°T) | Magnetic Variation | Distance (NM)/ Time | Turn Direction | Altitude (FT)/ Flight level | Speed (KT) | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------------|--------------------|---------------------|----------------|-----------------------------|------------|--------------------------|
| 001           | IF              | TAGOL               | —        | —                   | 8.3                | —                   | —              | —                           | —          | RNAV1                    |
| 002           | TF              | OBANO               | —        | 180(188.6)          | 8.3                | 31.6                | —              | +FL110                      | —          | RNAV1                    |
| 003           | TF              | VI304               | —        | 184(192.5)          | 8.3                | 8.2                 | —              | +FL100                      | -250       | RNAV1                    |
| 004           | TF              | BILDI               | —        | 184(192.3)          | 8.3                | 14.1                | —              | +5000                       | -230       | RNAV1                    |

**UTENU 2A**

| Serial Number | Path Descriptor | Waypoint Identifier | Fly-over | Course/Track °M(°T) | Magnetic Variation | Distance (NM)/ Time | Turn Direction | Altitude (FT)/ Flight level | Speed (KT) | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------------|--------------------|---------------------|----------------|-----------------------------|------------|--------------------------|
| 001           | IF              | UTENU               | —        | —                   | 8.3                | —                   | —              | —                           | —          | RNAV1                    |
| 002           | TF              | VI106               | —        | 178(186.1)          | 8.3                | 15.9                | —              | +FL160                      | —          | RNAV1                    |
| 003           | TF              | OBANO               | —        | 207(215.5)          | 8.3                | 18.4                | —              | +FL110                      | —          | RNAV1                    |
| 004           | TF              | VI304               | —        | 184(192.5)          | 8.3                | 8.2                 | —              | +FL100                      | -250       | RNAV1                    |
| 005           | TF              | BILDI               | —        | 184(192.3)          | 8.3                | 14.1                | —              | +5000                       | -230       | RNAV1                    |

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYVI AD 2.22

Changes: MAG VAR.

## VILNIUS

RNAV 1 (GNSS, DME/DME) STAR

RWY 01

## TABULAR DESCRIPTION

## HOLDINGS IDENTIFICATION

| Holding fix | Geographical coordinates | Inbound track °M(°T) | Magnetic Variation | Outbound distance (NM)/ Time | Turn Direction | Minimum/Maximum holding altitude (FT)/Flight level | Speed (KT) |
|-------------|--------------------------|----------------------|--------------------|------------------------------|----------------|----------------------------------------------------|------------|
| BILDI       | 54 35 16.4N 024 56 43.1E | 141(149.5)           | 8.3                | 1 min                        | L              | +5000                                              | -230       |
| INSOL       | 54 28 37.0N 025 21 03.5E | 204(212.1)           | 8.3                | 1 min                        | L              | +5000                                              | -230       |
| NOLNA       | 54 21 46.6N 025 05 54.5E | 013(021.7)           | 8.3                | 1 min                        | R              | +4000                                              | -230       |
| OBANO       | 54 57 05.1N 025 05 00.8E | 184(192.5)           | 8.3                | 1-1.5 min                    | L              | +5000                                              | —          |

## WAYPOINT COORDINATES

| FIX/POINTS | COORDINATES              | FIX/POINTS | COORDINATES              | FIX/POINTS | COORDINATES              |
|------------|--------------------------|------------|--------------------------|------------|--------------------------|
| VI106      | 55 11 58.3N 025 23 37.4E | DIMTA      | 54 16 57.1N 024 20 08.9E | OBANO      | 54 57 05.1N 025 05 00.8E |
| VI301      | 54 18 58.6N 024 39 07.5E | DUKAT      | 54 28 17.3N 025 36 55.2E | SOGBI      | 54 12 47.0N 025 11 45.0E |
| VI302      | 54 31 40.5N 024 31 20.4E | IKAMU      | 55 20 40.3N 024 38 12.5E | TAGOL      | 55 28 16.8N 025 13 17.4E |
| VI303      | 54 45 21.1N 024 37 36.2E | INSOL      | 54 28 37.0N 025 21 03.5E | UTENU      | 55 27 42.8N 025 26 36.0E |
| VI304      | 54 49 04.2N 025 01 54.9E | IRKAL      | 54 29 02.4N 024 13 11.9E | PBZ        | 54 55 38.0N 025 14 23.0E |
| VI305      | 55 15 49.3N 024 43 44.6E | LAFAT      | 54 49 52.0N 025 46 43.0E | SML        | 54 40 31.2N 024 41 32.4E |
| VI306      | 54 44 17.5N 025 31 59.2E | MURUN      | 55 28 46.6N 024 58 40.1E | VLK        | 54 21 02.9N 024 48 13.2E |
| VI307      | 54 48 07.1N 025 34 38.7E | NEDAM      | 54 57 10.4N 024 14 51.1E | VNO        | 54 38 09.8N 025 17 37.1E |
| BILDI      | 54 35 16.4N 024 56 43.1E | NOLNA      | 54 21 46.6N 025 05 54.5E |            |                          |

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYVI AD 2.22

Changes: MAG VAR.