


**KAUNAS
ILS CAT II Y or LOC
RWY 26 (CAT A/B/C/D)**

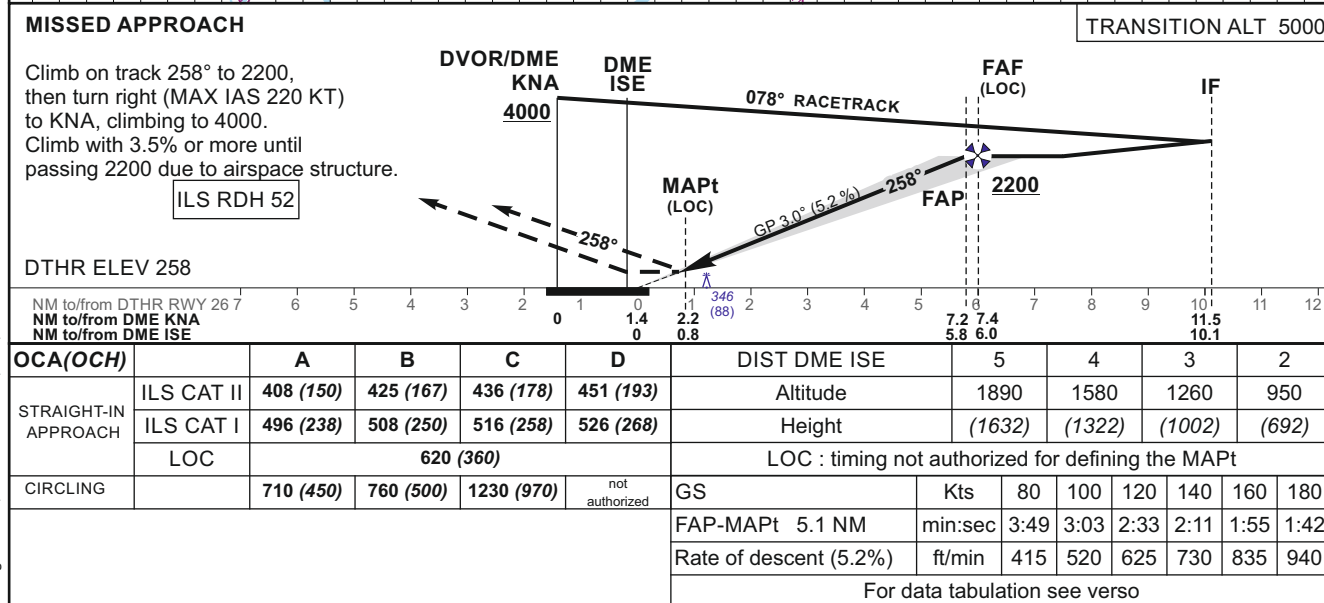

INSTRUMENT APPROACH CHART - ICAO	AERODROME ELEV 259 HEIGHTS RELATED TO DTHR RWY 26 - ELEV 258	TWR 124.205 118.505 ATIS 129.055	KAUNAS ILS CAT II Y or LOC RWY 26 (CAT A/B/C/D)
--	---	--	--

TABULAR DESCRIPTION

ILS or LOC INSTRUMENT APPROACH from IAF(KNA)		
FIX/POINTS	COORDINATES	FIX FORMATION
KNA (IAF)	54 57 37.4N 024 03 59.1E	
IF	54 58 44.2N 024 23 46.4E	BRG 256.75° / 11.46 NM KNA ; BRG 257.53° / 10.09 NM ISE
FAF	54 58 24.0N 024 16 41.1E	BRG 256.32° / 7.36 NM KNA ; BRG 257.53° / 5.99 NM ISE
FAP	54 58 23.3N 024 16 25.6E	BRG 256.28° / 7.21 NM KNA ; BRG 257.53° / 5.84 NM ISE
MAPt	54 57 57.9N 024 07 42.5E	BRG 253.38° / 2.17 NM KNA ; BRG 257.53° / 0.80 NM ISE
DTHR RWY 26	54 57 53.79N 024 06 19.46E	
DME ISE	54 57 49.0N 024 06 00.1E	
LOC ISE	54 57 44.97N 024 03 21.54E	
Final approach (LOC) descent angle: 3.00°		