
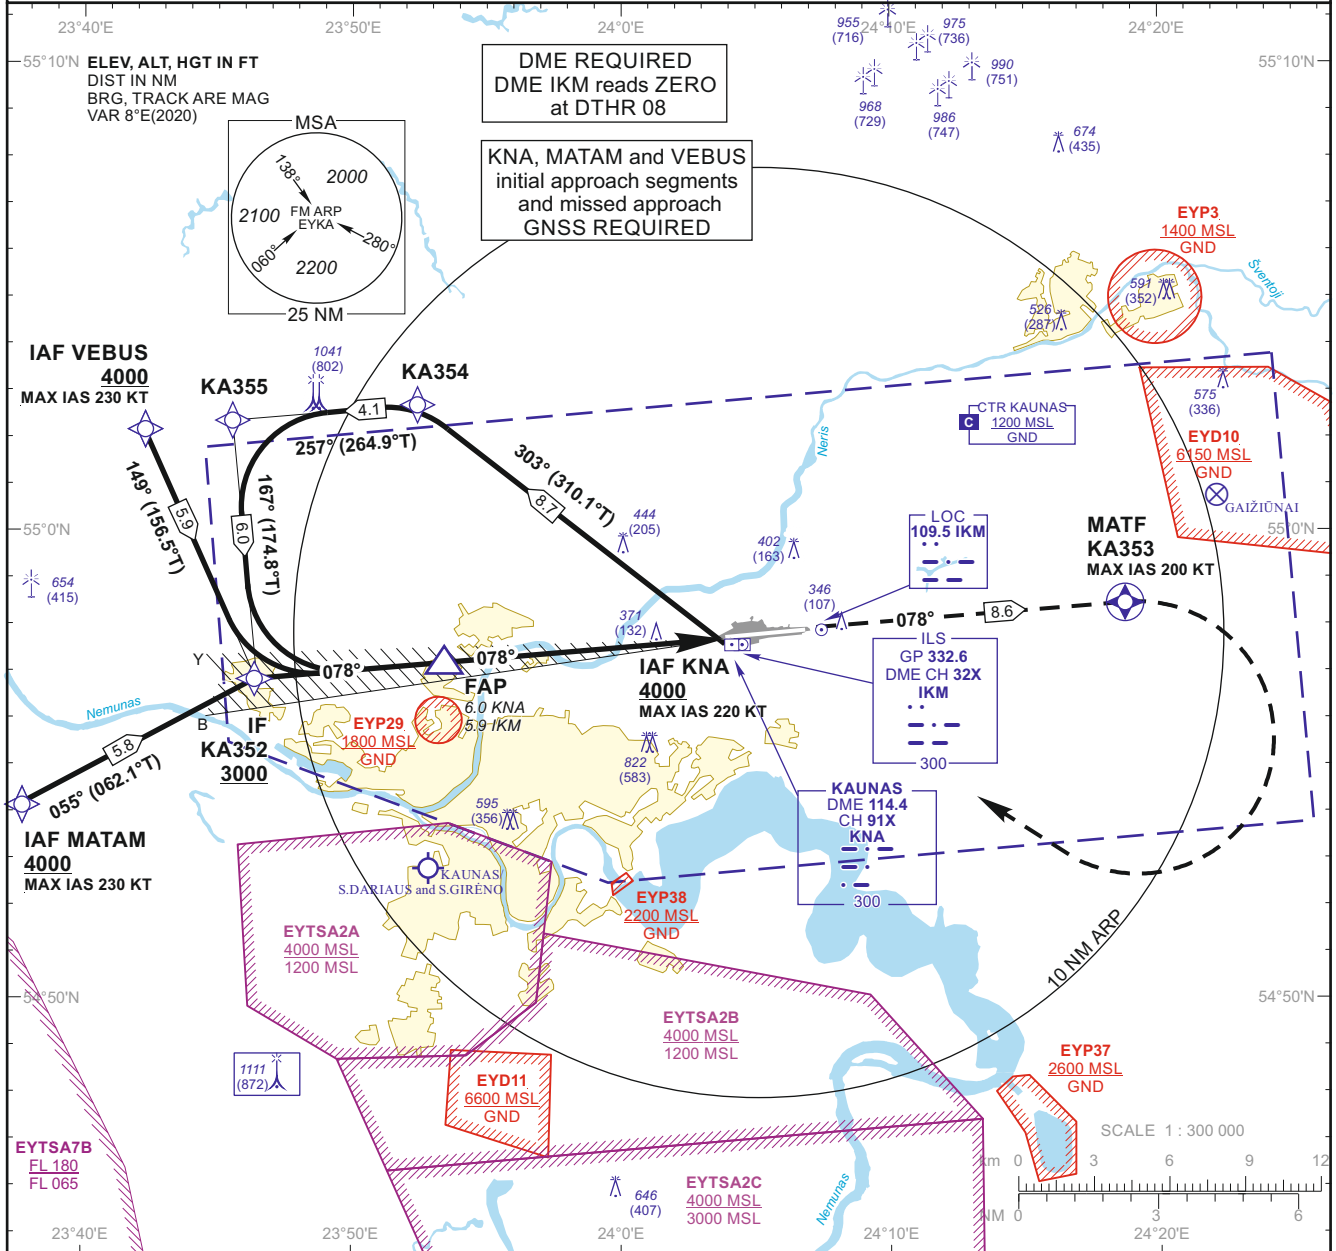


INSTRUMENT
APPROACH
CHART - ICAOAERODROME ELEV 259
HEIGHTS RELATED TO
DTHR RWY 08 - ELEV 239TWR 124.205
ATIS 118.505
129.055KAUNAS
ILS Z RWY 08
(CAT A/B/C/D)

TRANSITION ALT 5000

MISSED APPROACH

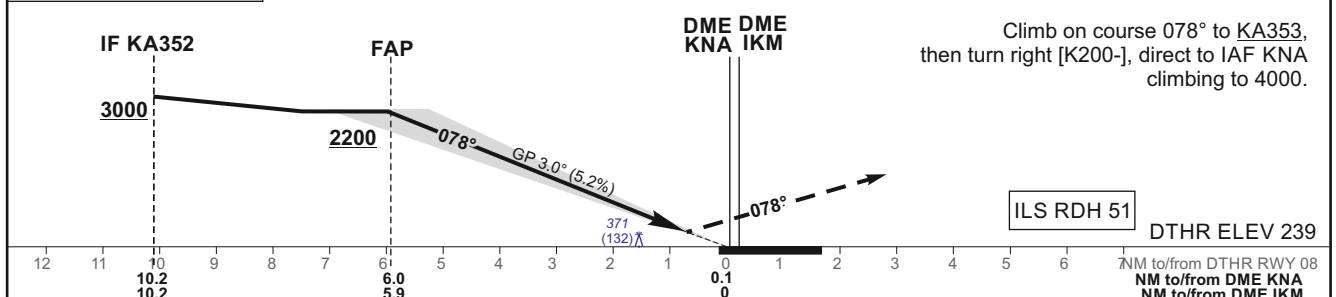

OCA(OCH)		A	B	C	D	DIST DME IKM		5	4	3	2			
STRAIGHT-IN APPROACH	ILS CAT I	492 (253)	504 (265)	512 (273)	523 (284)	Altitude		1870	1560	1240	930			
						Height		(1631)	(1321)	(1001)	(691)			
CIRCLING		710 (450)	760 (500)	1230 (970)	not authorized									
						GS		Kts	80	100	120	140	160	180
						FAP-DTHR 5.9 NM		min:sec	4:25	3:32	2:57	2:32	2:13	1:58
						Rate of descent (5.2%)		ft/min	415	520	625	730	835	940
						For data tabulation see verso								

For data tabulation see verso

Changes: MSA; obstacles added; FAP; IAF KNA altitude.

13 JUL 2023

©2019 ORO NAVIGACIJA

AIRAC AMDT 002/2023

INSTRUMENT APPROACH CHART - ICAO		AERODROME ELEV 259 HEIGHTS RELATED TO DTHR RWY 08 - ELEV 239		TWR 124.205 118.505 ATIS 129.055		KAUNAS ILS Z RWY 08 (CAT A/B/C/D)					
TABULAR DESCRIPTION											
IAF KNA, INITIAL APPROACH											
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)/ Time	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	VPA/TCH	Navigation Specification
001	IF	KNA	—	—	7.5	—	—	+4000	-220	—	RNAV 1
002	TF	KA354	—	303(310.1)	7.5	8.7	—	—	—	—	RNAV 1
003	TF	KA355	—	257(264.9)	7.5	4.1	—	—	—	—	RNAV 1
004	TF	KA352	—	167(174.8)	7.5	6.0	—	+3000	—	—	RNAV 1
IAF MATAM, INITIAL APPROACH											
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)/ Time	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	VPA/TCH	Navigation Specification
001	IF	MATAM	—	—	7.5	—	—	+4000	-230	—	RNAV 1
002	TF	KA352	—	055(062.1)	7.5	5.8	—	+3000	—	—	RNAV 1
IAF VEBUS, INITIAL APPROACH											
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)/ Time	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	VPA/TCH	Navigation Specification
001	IF	VEBUS	—	—	7.5	—	—	+4000	-230	—	RNAV 1
002	TF	KA352	—	149(156.5)	7.5	5.9	—	+3000	—	—	RNAV 1
MISSED APPROACH											
001	—	RW08	—	—	7.5	—	—	—	—	—	RNAV 1
002	CF	KA353	Y	078(085.27)	7.5	8.60	—	—	-200	—	RNAV 1
003	DF	KNA	—	—	7.5	—	R	+4000	-220	—	RNAV 1

Changes: tabular description coding.